

## EFFECT OF PLOUGHING DEPTH AND SPEED ON TRACTOR FUEL CONSUMPTION IN A SANDY-LOAM SOIL OF OYO STATE-NIGERIA

E. A. Ajav and A. O. Adewoyin

Department of Agricultural and Environmental Engineering, Faculty of Technology,  
University of Ibadan, Ibadan, Nigeria.

E-mail: [ea.ajav@mail.ui.edu.ng](mailto:ea.ajav@mail.ui.edu.ng), [adewoyin\\_adewale@yahoo.com](mailto:adewoyin_adewale@yahoo.com),

### ABSTRACT

Farm Tractor acquisition in Oyo State-Nigeria is fast growing despite its huge initial capital outlay. These tractors are primarily utilized for ploughing operations which represents the most costly single item in the budget of an arable farmer. Tractor fuel consumption constitutes a significant parameter that affects tractors performances for ploughing operations. The effect of ploughing speed and depth on tractors fuel consumption was therefore examined in a bid to establish their optimum operating conditions.

The soil characteristics of the study site were determined using laboratory tests. Ploughing operations, using ASABE standard D497.5 were carried out on 100 x 500 m research farmland using Massey Ferguson (MF 435, 100hp), Fiat (F130D, 100hp) and Steyr (CVT170, 100hp) tractors that were purchased in 2009. Field experiments were conducted at 5.5, 6.5 and 7.5 km/h ploughing speeds for ploughing depths of 20, 25 and 30cm. The fuel consumption was measure by estimating the quantity of diesel that fills the tractor fuel tank to capacity after each runs of the experiment. The results were subjected to statistical analysis using ANOVA and multiple regression analysis ( $p < 0.05$ ).

The soil type in the study site is predominantly sandy-loam. Mean fuel consumption for Fiat, MF and Steyr models were 23.35, 23.58 and 24.55 l/ha while average of 16.78, 22.02 and 32.67 l/ha of diesel were used to plough 20, 25 and 30cm depths respectively. Fuel consumption values increases with ploughing dept significantly, there is 31% increase from 20 to 25cm and 48% increase from 25 to 30cm depths. Mean fuel consumption at 5.5, 6.5 and 7.5 km/h ploughing speeds were 20.0, 24.25 and 27.23 l/ha respectively. Fuel consumption increased by 4.25 liters (21%) when speed is increased from 5.5 to 6.5 km/h and 2.98 liters (12%) when speed increases from 6.5 to 7.5 km/h. Mean fuel consumption (23.35, 23.58, 24.55) l/ha for MF, Fiat and Steyr tractors respectively were significantly different at the various speeds and ploughing depths ( $0.87 \leq r^2 \leq 0.99$ ).

The most appropriate combination of ploughing operating parameters in terms of tractor fuel economy is achieved using Fiat tractors at 6.5 km/h ploughing speed and 25cm ploughing depth. Tractors' performance for ploughing operation depends significantly on ploughing speed, ploughing depth and tractor type. However, the depth of crop roots should determine the appropriate ploughing depth in order to minimize expenses on fuel.

**KEYWORDS:** Tractor performance, soil types, ploughing depth, ploughing speed, fuel consumption.

### 1. INTRODUCTION

In Nigeria, agricultural mechanization is one of the greatest contributions of technological advancements to agricultural production. The appropriate choice and subsequent proper use of mechanized inputs into agriculture has a direct and significant effect on the achievable levels of land productivity, labour productivity, the profitability of farming, the environment and the quality of life of people engaged in agriculture. Government at all levels considered acquisition and subsequent distribution of farming equipment especially tractors as a significant action that improves agricultural production, yet, no commensurable attention has been devoted to performance management of these equipments with respect to adequacy, appropriateness, economic efficiency and sustainability (Cecil *et al*, 2002).

Due to the global demand for food items, the increased costs of mechanization on the farm and the current disposition of financial institutions towards agricultural credits, it became very critical for existing farmers, farm managers and agricultural investors to make informed decisions based on figures, and improve the management of mechanization operations. Bamigboye and Ojolo (2002) opine that the cost of operating farm tractors can be reduced if the right tractor is used for the right operation as well as operating at manufacturers' recommended annual use.

The formulation of appropriate agricultural mechanization strategy that provides the basic conditions for largely self sustaining developments might not be effective without critical assessment of the economic implication of the requisite investment. Profit making is critical to the success and sustainability of any business venture and it is pertinent that agricultural mechanization follow the same trend for a meaningful economic and environmental impact.

The tractor is the main unit of farm machinery and ensures better quality of farm operations, timely completion of farm activities, better management supervision and dignity of labour (Sandeep and Kumar, 2006). Tillage activities in Oyo State-Nigeria especially for large scale farmers are achieved through the use of farm tractors and relevant equipment. The majority of the farm tractors acquired in Oyo State Nigeria are directed towards tillage operation among other uses. AL-Suhaibani S.A and A.E. Ghaly (2006) defines tillage as the process of creating a desirable soil condition for seed germination and growth. Tillage provides good weed control with low herbicide cost; allows the control of disease and insects by destroying them through burying of crop residues. Three things are involved in soil tillage which includes: the power source, the soil and the implement (Olatunji, 2007).

The tillage of soil is considered to be one of the biggest farm operations as it requires the most energy on the farm. Disc plough is widely used in Oyo State Nigeria by farmer as primary tillage tool. Ploughing operation is the mechanical manipulation of the soil aimed at improving soil conditions for crop production. It represents the most costly single item in the budget of an arable farmer. High levels of energy is required to cut and invert the soil, and the draft force required to plough also needs relatively high weight to give traction. (Adewuyi *et al*, 2006). The depth of ploughing depends on the crop to be cultivated, soil characteristics and also on the source of power available (Pandey, 2004).

Disc plough as the major tillage implement used in fields to substitute hoe and cutlass in Oyo State Nigeria is powered essentially by Massey Fergusson, Fiat and Steyr models of farm tractor being the commonly used farm tractors for ploughing operations having long service life and high efficiency among others (Adewoyin and Ajav, 2011). There are many parameters in tillage operation affecting fuel consumption of tractors, such as type and structure of soil, climate, relative humidity, tractor type, tractor size and tractor-implement relationship.

However, management planning and financial performance review of agricultural mechanization has suffered severe neglect especially by our local farmers and farm managers hence, it is perceived as a worthless and profitless business venture (Williams, 2009). However, apt investment and operational decision making are key management practices that are used to command profitability and sustainability of businesses by managers, therefore, efficient use of farm tractors and implement, and their contribution to a producer's relative cost of production is increasingly important (Aaron *et al*, 2003).

The steep rises in the price of tractors and other farm machines have lowered the purchasing power for farm machines by rural farmers and this trend is calling for management planning tool (Asoegwu and Asoegwu, 2007). This study places a particular attention on farm tractors for ploughing operation being the most explored primary tillage operation mode by farmers in the Oyo State Nigeria among several alternatives and, also it is considered as the most significant element of the total crop production systems with the largest fixed and operational costs.

Research has been conducted for measuring the effect of ploughing depth on average and instantaneous fuel consumption with three-share disc plough using fuel flow meter and electronic board (Fathollahzadeh et al, 2009), they reported that some of the factors that affects the fuel consumption of tractors during ploughing operation vary continuously in the farm. Al-Suhaibani S.A. and A.E. Ghaly (2010) investigated the effect of ploughing depth and forward speed on the performance of a medium size chisel plow operating in a sandy soil but the effect of ploughing depth and ploughing speed on the average fuel consumption for varieties of farm tractors operating in the same zone such as Oyo State Nigeria where there is high concentration of tractors and equipment as well as a large number of arable farmers has not been fully investigated and, or explored. In addition, there are no detailed studies in Nigeria related to the consideration of tractor fuel consumption in tillage operations using disc plough at various depths and ploughing speeds despite the fact that cost of fuel constitute over 70% of tractor's operational costs. Disc plough is widely used by Nigerian farmer and the performance data for the ploughing operation is essential to reduce cost of ploughing operation and make economic decisions.

In this research, tractor fuel consumption was measured at different ploughing depths and ploughing speeds.

## **1. MATERIALS AND METHODS**

### **1.1 Location of Study**

Nigeria is the largest country in Africa comprising of thirty six states and the Federal Capital Territory (FCT). It is categorized into eight (8) agro-ecological zones namely; semi-arid, dry sub-humid, sub-humid, humid, very-humid, ultra-humid, mountainous and plateau having various degree of climatic characteristics (FAO, 1991). Each of these zones is characterized by different land and climatic conditions aside the numerous socio-ethnic variations. This research work focused on Oyo State Nigeria where mechanized farming activities are relatively prevalent. The major occupation of the inhabitants is farming.

Oyo State is a typical southern guinea savannah with well drained sandy-loam soil, relatively light vegetation and sub-humid zone with annual rainfall ranging from 1000-1300mm. The climate of the area follows the tropical pattern with bi-modal rainfall peaks in July and September and the season runs from November till March every year with average annual temperature of about 32°C (FAO, 2001). The vegetation and the soil support the cultivation of maize, yam, cassava, legumes and tobacco. The research farmland of the Oyo State Agricultural Development Programme (OYSADEP), located in the northern area of Saki was selected. The farm is fully mechanized with a decent numbers of newly acquired farm equipment. The location of the study site is as shown in Figure 1.

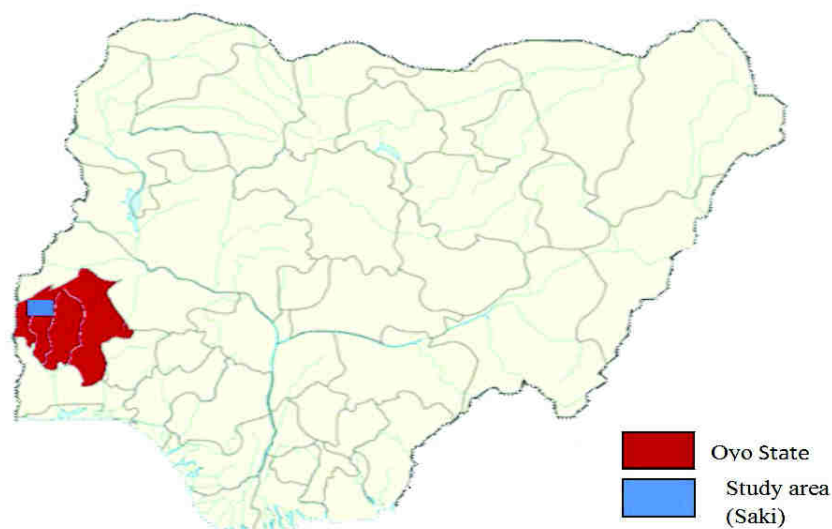


Figure 1. Map of Nigeria showing Oyo state and the study area

## 2.2 Sample Size and Sampling Techniques

Primary research data were collected using actual field experiments conducted on research farms via well designed completely randomized block designs using computer and statistical tools. The field experiments were conducted on a carefully measured and mapped five hectares farmland having 100 meters by 500 meters dimension on the three (3) research farms. Ploughing time, Ploughing speed, Ploughing depth and fuel consumption were recorded in three replications for each run of the experiment. There were twenty seven (27) runs for each of the three (3) tractor types with three (3) replications resulting in Two Hundred and Forty Three (243) runs. These data were coded in a randomized complete block with both discrete and numeric input variables.

## 2.3 Experimental Procedure

The field experiments were carried out on the research farmland of the Oyo State Agricultural Development Programme at Saki, Oyo State. Pre-experiment training was conducted for the research assistants with the aim of understanding the research purpose, procedures and ensures adequate understanding of the function of each assistant on the field. The research field was measured, marked and mapped out with pegs to create a 100m length by 500m field. A medium size (100hp), fully instrumented Massey Fergusson, Fiat and Steyr models of farm tractors purchased in 2010 were used to carry out the ploughing operations at the depth of 10, 20 and 30cm for each of 5.5, 6.5 and 7.5km/h tractor speeds. The specifications of each tractor are in Table 1.

Table 1. Farm Tractors Specification

Specifications	Massey Fergusson	Fiat	Steyr
Model	MF 435	F130 D	CVT 170
Type of Engine	4-Cylinder	4-Cylinder	4-Cylinder
Type of Fuel	Diesel	Diesel	Diesel
Type of Steering System	Power-assisted	Power-assisted	Power-assisted
Transmission	8X2 4WD	8X2 4WD	8X2 4WD
Type of Injector Pump	In-line Injector	In-line Injector	In-line Injector
Power Output (hp)	110	100	100
Fuel Tank Capacity (L)	70	70	70
Rated Engine Speed (rpm)	2600	2600	2500
Type of Cooling System	Water-cooled	Water-cooled	Water-cooled



Front Tyre Size	6.0- 16	6.0- 16	6.0- 16
Front Inflation Pressure (psi)	32	32	32
Rear Tyre Size	15.4-28	14-28	16.5-28
Rear Inflation Pressure (psi)	28	28	28

Source: Field Experiment 2011

Each run of the ploughing operation experiment was carried out of a 400m length (4 - to and fro along the 100m field) with three replications each. The same disc plough set with given working width, tilt angle and disc angles was used for the ploughing. Ploughing depth and acquiring tractor speed were adjusted uniformly and stabilized in an area with length of approximately 10 m before the target field length. The speeds of ploughing were determined using the tractor hand throttle and constant gear ratio (monitored on the tractor's dash board) and the ploughing depths were selected and fixed using the tractor depth controller. The ploughing depth was measured using a steel measuring tape with the undisturbed soil surface as a reference (Fig. 2-3).

The fuel tank of tractors was filled to capacity at the commencement of each run of the ploughing operation experiments. Quantity of diesel consumed by each tractor for the ploughing operations were estimated at the end of each run by measuring the amount of fuel required to refill the fuel tank to capacity using measuring cylinders. Three replications of each runs were recorded for each tractor at the varying plough depth and speeds.



Figure 2. The ploughing operation in progress



Figure 3. Measuring ploughing effective width of cut

## 2. RESULTS AND DISCUSSION

The results of the soil analysis tests carried out on the research farmland is shown in Table 2. The soil is found to be predominantly sandy-loam, almost neutral and has high water retention ability with average moisture content of 16.70% dry basis and 1160 kg/m<sup>3</sup> bulk density. Air temperature measured 23-25 °C during the experiment. This bulk density is slightly higher than the 1102 kg/m<sup>3</sup> reported by Fathollahzadeh *et al*, (2009) on the sandy soils of Tehran, Iran. This is accounted for by the variation in the soil texture and moisture content. Vegetation is sparsely populated in the research location and the soil is nearly neutral with pH level of 7.1

Table 2. Soil Analysis Tests on Research Farm

Variables	Soil Characteristics
pH Level	7.1
% Sand	57
% Silt	19
% Clay	24
Soil Type	Sandy-Loam

Source: Field experiments, 2010

The average fuel consumption for Fiat, Mercy Ferguson and Steyr models of tractor are 23.35, 23.58 and 24.55 l/ha respectively. The fuel consumption of these three tractors were measured for ploughing depths of 15, 25 and 30 cm with 16.70% moisture content, 7.1 pH and 1,206 kg/m<sup>3</sup> bulk density. The summary of the fuel consumption of the three commonly used farm tractors in Oyo State-Nigeria at the various ploughing depth and ploughing speed is presented in Table 3. The operation of the disc plough requires average of 16.79, 22.02 and 32.67 l/ha of diesel for ploughing depths of 15, 25 and 30cm respectively. Analysis of variance and Duncan multiple range tests reveals that tractor fuel consumption increases significantly with increase in ploughing depth at 5% significance level.

Table 3. Average Fuel Consumption of Tractors at Various Ploughing Speed and Depths

	Ploughing Speed (Km/h)			Ploughing Depth (cm)			Tractor Type		
	5.5	6.5	7.5	20	25	30	Fiat	MF	Steyr
<b>F<sub>c</sub></b>	20.00	24.25	27.23	16.79	22.02	32.67	23.35	23.58	24.55
<b>S<sub>d</sub></b>	6.23	7.97	7.93	1.10	6.44	4.02	7.62	7.98	8.29

F<sub>c</sub> = Fuel Consumption (l/ha), S<sub>d</sub> = Standard Deviation, MF = Massey Ferguson

The fuel consumption value increased by 5.23 liters (31%) when ploughing depth increased from 20 to 30cm while it increased by 10.65 liters (48%) when ploughing depth increases from 25 to 30cm. The increase in fuel consumption when ploughing depth was increased from 20 to 25cm was higher than the increase in fuel consumption when ploughing depth is increased from 25 to 30cm. The linear relationship between tractor fuel consumption and ploughing depth is represented as equation 1.

$$F_c = 1.59d - 15.85 \quad (R^2 = 0.966) \quad (1)$$

Where; F<sub>c</sub> - fuel consumption (l/ha) and d - ploughing depth (cm).

Farm tractors' average fuel consumption at ploughing speed of 5.5, 6.6 and 7.5km/h were 20.00, 24.25 and 27.23 l/ha respectively. The average fuel consumption of farm tractors increased with increase in ploughing speed. An increase of tractor ploughing speed from 5.5 to 6.5 km/h resulted in increase of fuel consumption by 4.25 liters(21%) while increase in ploughing speed from 6.5 to 7.5 km/h increased tractor

fuel consumption by 2.98 liters (12%). Fuel consumption increased with ploughing speed of farm tractors, the linear relationship is represented by equation 2.

$$F_c = 2.57s + 7.11 \quad (R^2 = 0.973) \quad (2)$$

Where;  $F_c$  = fuel consumption (l/ha) and  $s$  = ploughing speed (km/h)

The three-dimensional surface relationship between tractor fuel consumption, ploughing depth and ploughing speed is represented as shown in figure 4. The fuel consumption of farm tractors increases with ploughing depth and ploughing speed however the effect of increasing the ploughing depth within the 30 cm top soil depth on tractor fuel consumption is greater than the effect of increasing the tractor ploughing speed from 5.5 to 7.5 km/h.

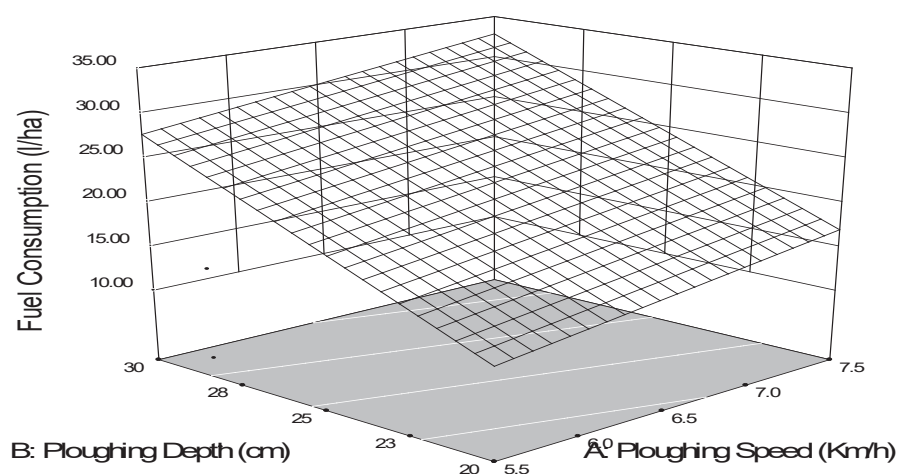


Figure 4. The effect of ploughing speed and ploughing depth on tractor fuel consumption

The effect of ploughing depth and speed on the fuel consumption of farm tractor during ploughing operation on the sandy-loam soil of Oyo State Nigeria was examined in this study. The results reveal that the fuel consumption of farm tractor varies with changes in ploughing speed and depth and the model that gives the best fit is a linear relationship represented in equation 3.

$$F_c = 23.83 + 2.57s + 7.94 + 0.42sd \quad (R^2 = 0.965) \quad (3)$$

Where;  $F_c$  –fuel consumption (l/ha),  $s$ -ploughing speed (km/h),  $d$ -ploughing depth (cm)

The mean fuel consumption of Fiat, MF and Steyr being the commonly used farm tractor in Oyo State-Nigeria as a function of the ploughing depth and ploughing speed is shown in Figure 5. Ploughing depth and speed were varied in this experiment as effective factors that impact the fuel consumption of farm tractors. There are other parameters that affect tractors' fuel consumption during ploughing operation such as compression ratio, plant residue, tractor's size and variation in tractor engine configurations.

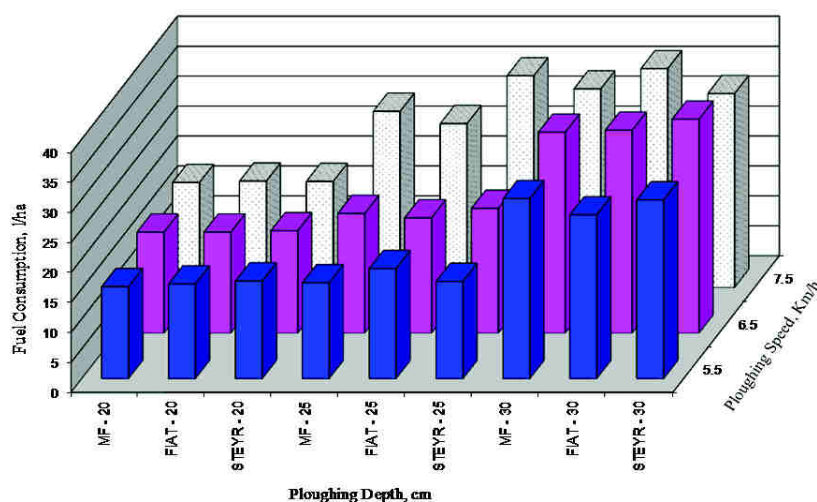


Figure 5. Effect of ploughing depth and speed on the fuel consumption of some commonly used farm tractors on the sandy-loam soil of Oyo state – Nigeria

Fathollahzadeh et al, (2009) examined the effect of ploughing depth on the instantaneous tractor fuel consumption with three-share disc plough using a 72.3kw John Deere 3140 tractor in Iran and they reported that the tractor consumed average of 19.66, 24.71 and 28.64 liters of fuel per hectare for ploughing depth of 15, 23 and 30 cm respectively on a loam-clay soil. The variation in the fuel consumption with ploughing depth agrees with the findings of this work though the value of the fuel consumption in this study are higher than that reported by Fathollahzadeh et al, (2009) because bigger tractors were used in this study and it is expected that bigger tractor will consume more fuel than smaller ones.

Analysis of variance shows that ploughing speed and ploughing depth varies significantly with tractor fuel consumption. The average fuel consumption of 23.35, 23.58 and 24.55 for Fiat, MF and Steyr respectively are however not significantly different ( $p \leq 0.05$ ), this is shown in Table 4. This agrees with the findings of Ahaneku et al, (2009) on the comparative evaluation of three models of Mahindra tractor. They reported that the fuel consumption parameter did not show any significant difference when operated at the same conditions.

Table 4. Analysis of Variance for Tractor Fuel Consumption during Ploughing Operations at various depths and speeds

Source of Variance	Sum of Squares	df	Mean Square	F Value	p-value Prob > F
Model	11423.17	4	2855.79	174.78	< 0.0001
Ploughing Speed	1071.60	1	1071.60	65.58	< 0.0001
Ploughing Depth	10204.75	1	10204.75	624.53	< 0.0001
Tractor type	146.82	2	73.41	4.49	0.0122
Residual	3888.86	238	16.34		
Lack of Fit	3140.53	72	43.62	9.68	< 0.0001
Pure Error	748.33	166	4.51		
Cor Total	15312.03	242			

Source: Field experiment, 2010



Kheiralla *et al.* (2007) measured fuel consumption for a disc plough with three shares attached to a 64kw MF3060 tractor in various conditions. They reported fuel consumption values of 20.6 and 22.7 for 17.4 and 23.4 cm depths respectively. Although the conditions were different, average fuel consumption values obtained in this study are close to those reported by Kheiralla *et al.* (2007). The observed trend signifies that fuel consumption varies with ploughing speed and depth among other factors that affects fuel consumption during ploughing as reported by Srisvastava, 1993 and McLaughlin, 1993. These researchers observed that soil texture, soil moisture content, soil compression ratio, plant residue and bulk density affects tractor fuel consumption during ploughing operation.

Shallow seed placement (less than 25 mm) is recommended for most crops that are directly seeded (Collins and Fowler, 1996). However, the depth of the crop roots should determine plowing depths, while the availability of time and implement width will determine the speed required to finish the work on time (Mustafa and Turgut, 2007). The results obtained from this study indicated that the ploughing depth has more effect on the tractor fuel consumption than the ploughing speed. Therefore, the depth of plowing should be determined based on the root length of crop. Increasing the ploughing speed will improve the quality of the seedbed and will not increase the fuels consumption proportionally.

### 3. CONCLUSIONS

The effect of ploughing depth and ploughing speed on the fuel consumption of commonly used farm tractors in Oyo State- Nigeria was investigated. The results indicated that increase in ploughing depth and ploughing speed significantly increases tractor fuel consumption. However, ploughing depth is the most impactful factor in the determination of tractor fuel consumption during ploughing operations.

The depth of ploughing operation should be determined based on the root type, length and size of crop to be cultivate, while the availability of time, soil texture and implement width will determine the speed required to finish the ploughing operation. The results obtained from this study indicate that the ploughing depth has more effect on the fuel consumption of farm tractors than the ploughing speed. Therefore, the depth of plowing should be determined based on the root length of crop in other to optimize cost of fuel.

### REFERENCES

- Aaron B., Kelvin d., and T . Kastens. 2003. Per Unit Cost to Own and Operate Farm Machinery. Southern Agricultural Economics Association Annual Meeting, Mobile, Alabama.
- Adewoyin A.O. and E.A. Ajav. 2011. Appraisal of the Utilization and Performance of Farm Tractors for Ploughing Operations in Selected States of South-western Nigeria. Proceedings of the 11<sup>th</sup> International Conference & 32<sup>nd</sup> Annual General Meeting, Nigerian Institution of Agricultural Engineering. Vol 32, 2011.
- Adewuyi, S.A., Ashaolu O.F., Ayinde, I.A., and S.O.Ogundele. 2006. Determinants of Farm Mechanization among Arable Crop Farmers in Ibarapa Zone, Oyo State, Nigeria. Moor Journal of Agricultural Research. 7(1): 49-55
- Ahaneku, I. E., Oyelade O.A. and T. Faleye 2009. Comparative Field Evaluation of Three models of a Tractor. Journal of Applied Science, Engineering and Technology. Vol. 7, No. 1: 90-99.
- Al-Suhaibani S.A. and A.E.Ghaly. 2010. Effect of Ploughing Depth of Tillage and Forward Speed on the Performance of a Medium size Chiesel Plow Operating in a Sandy Soil. American Journal of Agricultural and Biological Sciences 5(3): 247-255.
- Asoegwu, S. and A. Asoegwu. 2007. An Overview of Agricultural Mechanization and its Environmental Management in Nigeria. Agricultural Engineering International: the CIGR Ejournal. Vol. IX. P. 13-18
- Cecil, P., Mataba T. and E.A. Barveh. 2002. Agricultural Tractor Ownership and Off-Season Utilization in the Kgatleng District of Botswana. Agricultural Mechanization in Asia, Africa and Latin America 33(3): 66.

- Bamigboye I and S. Ojolo. 2002. Cost of Operating Farm Tractors. *Moor Journal of Agricultural Research*, 3(2): 229-232.
- FAO. 1991. Guidelines for soil profile description. 2<sup>nd</sup> Edition. FAO, Rome.
- Fathollahzadeh H., Mobli H., and S.M.H Tabatabaie, 2009. Effect of Ploughing depth on average and instantaneous tractor fuel consumption with three-share disc plough. *International Agro-physics*, 2009, 23, 399-402
- Kheiralla A.F., Yahya A., Zohadie M., and Ishak W., 2007. Modeling of power and energy requirements for tillage implements operating in Serdang sandy clay loam, Malaysia. *Soil Till. Res.*, 78, 21-34.
- McLaughlin N.B., Heslop L.C., Buckley D.J., Amour G.R.St., Compton B.A., Jones A.M., and Van Bodegom P. 1993. A general purpose tractor instrumentation and data logging System. *Trans. ASAE*, 36(2): 65-273.
- Sandeep Y. and S. Kumar Lohar. 2006. Tractor and Implement Ownership and Utilization of Haryana. *Agricultural Mechanization in Asia, Africa and Latin America Vol. 37 No.3* pp 15-17.
- Olatunji O.M. 2007. Modeling the Effect of Weight, Draught and Speed on the Depth of Cut of Disc Plough during Ploughing. M.Tech Thesis, Department of Agricultural and Environmental Engineering, Rivers State University of Science and Technology, Port Harcourt, Nigeria. 102.
- Pandey M. M. 2004. Present Status and Future Requirements of Farm Equipment for Crop Production. Central Institute of Agricultural Engineering, Bhopal. Pp.67.
- Williams Edward. 2009. Farm Machinery Selection. *Ag Decision maker*, Iowa State University, University extension, File A3-28, PM 952, pp 1-8.